


KN1724P

Certus Eye and face wash, wall mounted

Product information

Each spray head has an internal flow control and filter to remove impurities. Operated by a push plate, stay-open ball valve. Delivered with collecting bowl and spray heads in ABS-plastic with details in chromed brass. The water supply should be designed for a minimal flow of 28 l/min at a pressure of 2,4-6,5 bar.

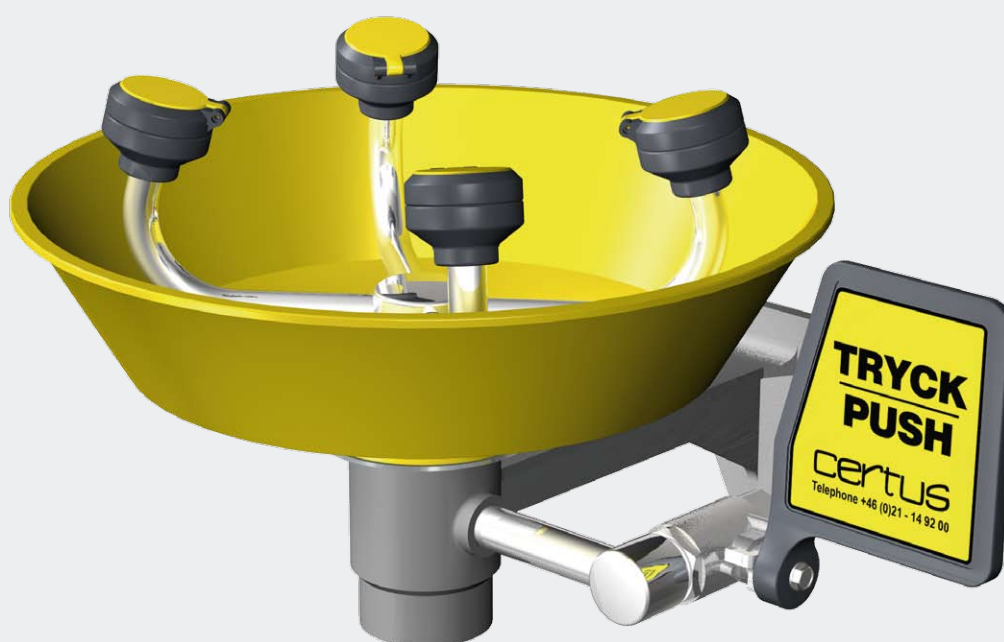

Technical information

Flow rate: ca 28 l/min
Water supply: 1/2" NPT female
Drain: 1 1/4" NPT female

Width: 400 mm
Height: 178 mm
Depth: 292 mm

An emergency sign is enclosed with each eyewash.

Visiting address

Metallverksgatan 12
SE-721 30 Västerås

Postal address

Box 404
SE-721 08 Västerås

Tel +46 (0)21-14 92 00
Fax +46 (0)21-14 92 50
www.krusman.com

Krusman
We ensure safety in risky environments