

3826


Krusman Emergency shower for outdoor use, wall mounted

Product information

Krusman Emergency shower with galvanized steel pipes and shower head in powder-coated stainless steel. Stay-open ball valve, operated by a pull handle and a pull rod for crawling person.

Designed for a minimum flow of 170 l/min at 2.4 bar pressure.

Please advise wall thickness when placing the order.

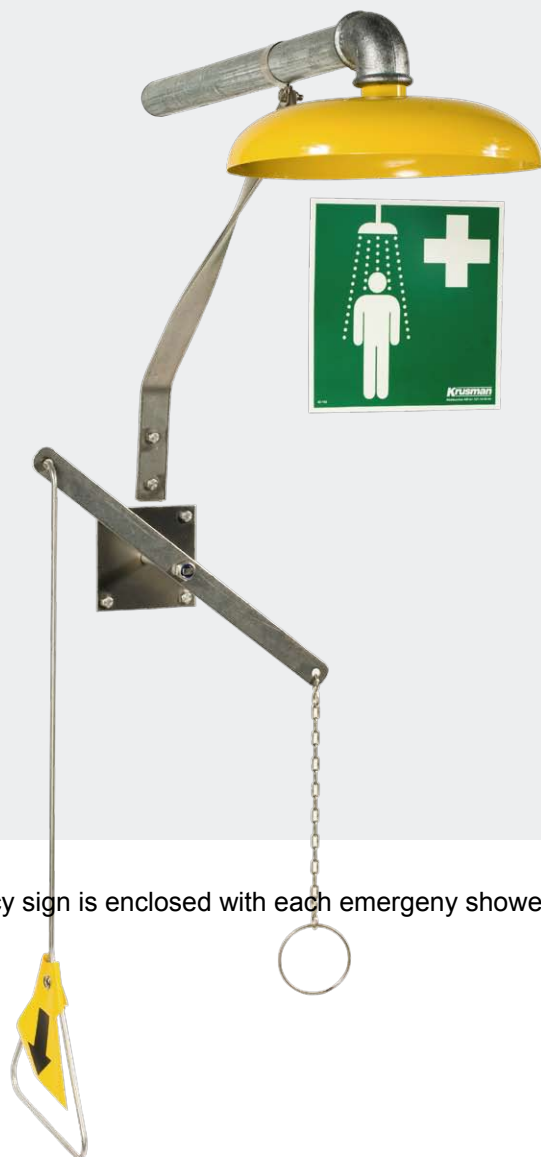

An emergency sign is enclosed with each emergency shower.

Technical information

Flow rate body: ca 170 l/min
Water supply: 1" female
Rec. height: 2300 mm

Visiting address

Metallverksgatan 12
SE-721 30 Västerås

Postal address

Box 404
SE-721 08 Västerås

Tel +46 (0)21-14 92 00
Fax +46 (0)21-14 92 50
www.krusman.com

Krusman
We ensure safety in risky environments