KND 605

Safety switch (EEX 95 TL)

Safety switch EEx 95 TL
Explosion-proof, zone 1 and 2

Material: Thermoplastic enclosure

Overlapping contacts and one NO and one NC contact.

Actuator head can be repositioned in steps 4 x 90°

TECHNICAL INFORMATION	
Operating voltage [V]	DC13 230V 0,25A
Operating temperature [°C]	-20°C...+60°C
Protections	IP 67

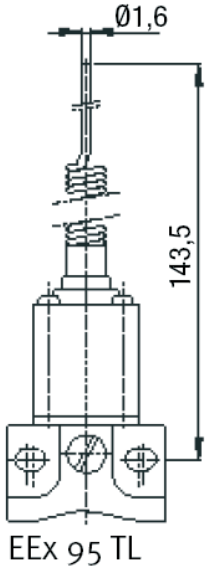

Krusman Nödduschar AB
Transformatorgatan 1
721 37 Västerås, SWEDEN

Tel +46 (0)21-14 92 00
Fax +46 (0)21-14 92 50
www.krusman.com