



Canopy with


lifting lugs \

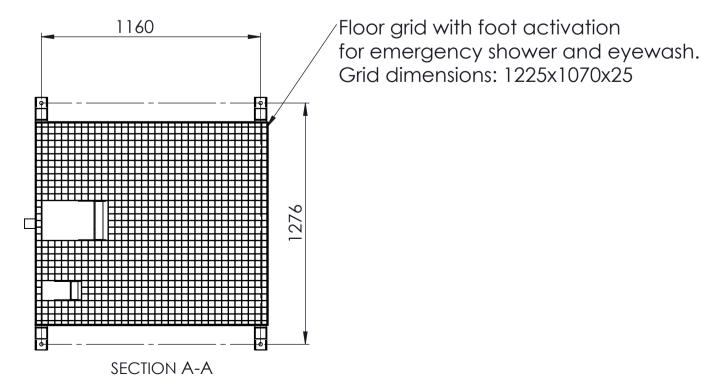

Catchment basin of stainless steel with drain, ensuring a safe collection of contaminated water.

Integrated separate Foot activation of emergency shower & eyewash.

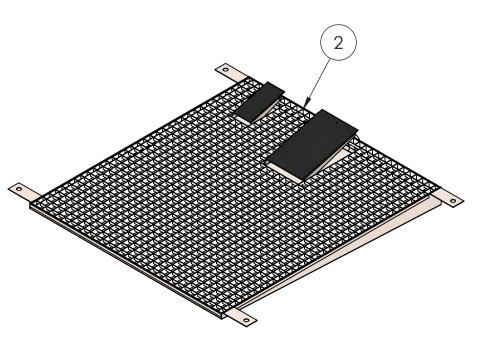

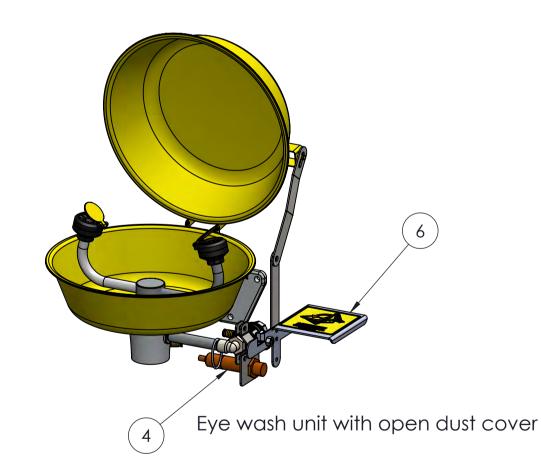

This drawing features a Tank Shower System with Immersion heater.

System setup can be completely customized according tó your requirements. Please contact us to help you design a system setup for your exact needs.

Flow rate emergency shower: 76l/m

Weight tank shower empty 350kg.

Flow rate emergency eyewash: 11,4l/m

Tank Shower model 7021-00

Stainless steel tank shower.

Equipment features

			Equip
17	1	LED Lighting fixture	
16	1	Y-Strainer	Insulated 1400L SS tank.
15	1	Flashing beacon	
14	1	Control card	
13	1	Junction box heater	}
12	1	Horn for siren alarm	Catchment basin for collection of contaminated water.
11	1	Flange connection 2"	
10	1	Heating element	
9	1	Wall panels, stainless steel with emergency arrowsigns	Comaminated water.
8	1	Thermometer	
7	1	Shower head 240mm, stainless steel	
6	1	Ball valve DN15 with push plate	
5	1	Pull rod, stainless steel	
4	2	Magnetic sensor	Phone: +46-(0)21-14 92 00
3	2	Eye wash unit with dust cover	Website: www.krusman.com
2	1	Catchment basin with foot pedal activation	7
1	1	Emergency sign, eye wash	Generic Exam
Pos	Qty	Description	1

Equipped with immersion heater for controlled water temperature.

*Equipment options to be customized according to customer requirements. Items shown in this generic drawing are common for the 7021 model.



Generic Example Drawing - Model 7021-00